TLC02

Telescopic Lifting Coulum







KEY FEATURES

More Powerfull

More Silent

More Duty Cycle

Lower Cost


Longer Life


Bidirectional mounting

STANDARD FEATURES

Push Load Capacity	6.000 N (max.)
Pull Load Capacity	4.000 N (max.)
Speed (full load to no load)	7-9 mm/s
Installation Diameter	Stroke + 137mm
Motor	24 VDC
Power Consumption	120 W
Current Consumption	5A
Limit Switch	Signal Type
Duty Cycle	10% (1/9)
Guidance Profile	Anodized Aluminium
Cable	1,5 m with Minifit Plug
Stroke	50-400 mm

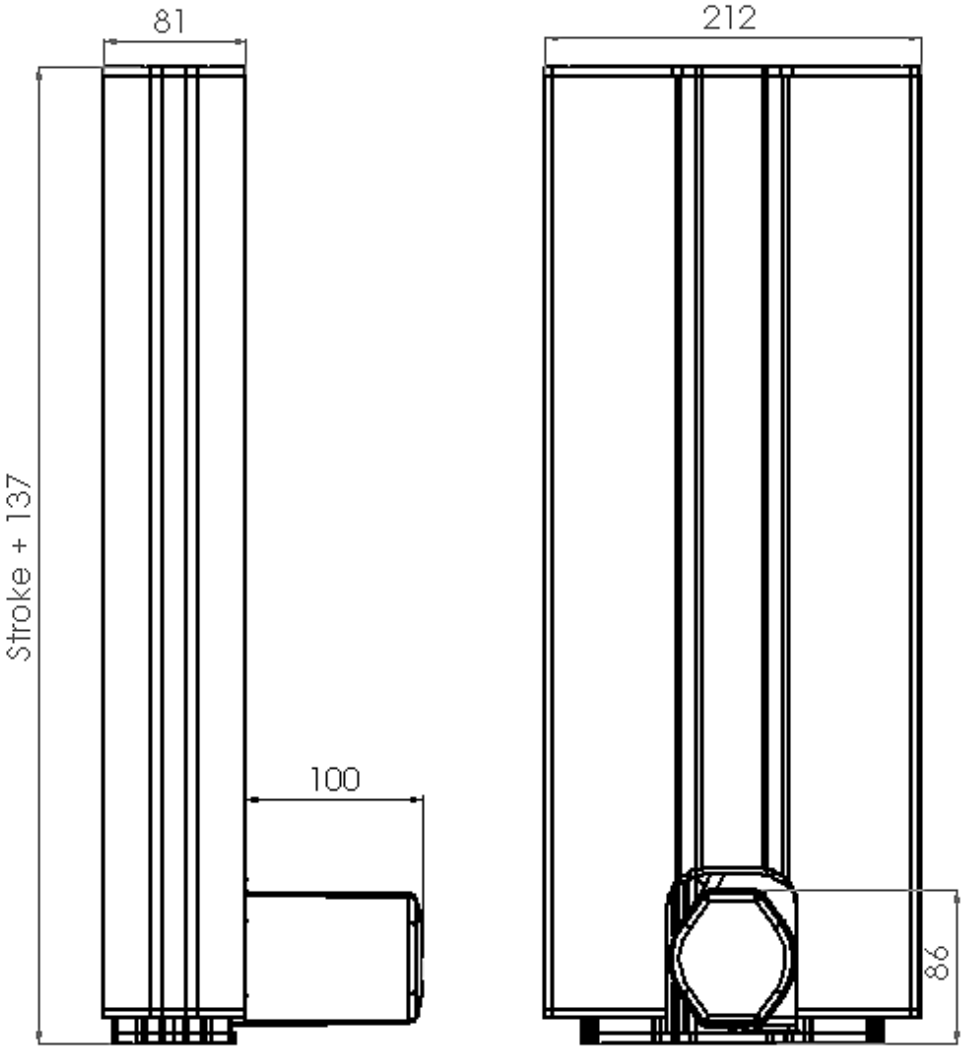


81
212
Stroke + 137
100
86

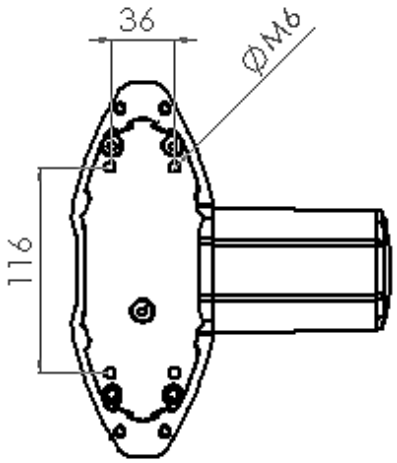
36
ØM6
116